

PURA™

Water Baths



Important Advantages:

- Working temperature range from[#] +18 °C to +99.9 °C
- Models with bath volumes from 0.8 to 36 liters
- Temperature stability*of ± 0.15 °C
- Heating capacity up to 2 kW
- Bright display and integrated timer
- Splash-proof protected mains switch
- Built-in dry running protection
- Specially designed edge surfaces, which drain condensed fluid back into the bath
- Removable platform for full immersion of the sample containers (included in the delivery)

with counter-cooling/bath cover (accessories)

* with bath cover (accessories)



Ease of use.

The controls on the front side are easy to reach and use.




Easy handling.

A frontally integrated drain screw allows clean, safe, and effortless emptying of the baths.



Easy cleaning.

PURA does not incorporate any interfering functional elements. The smooth surfaces can be cleaned quickly and without residue.

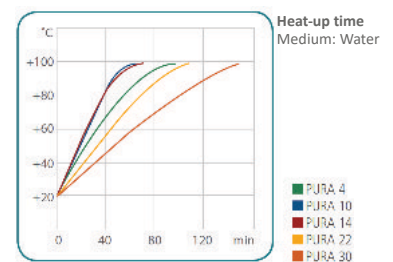

Model	Order No.	Working Temperature °C	Temperature stability °C	Heating capacity kW	Filling volume liters	Bath opening cm
PURA 4	9550504	+18 ... +99.9	±0.15	0.8	0.8 ... 4.5	12 x 27 / 14
PURA 10	9550510	+18 ... +99.9	±0.15	1.2	1.4 ... 9.5	22 x 27 / 14
PURA 14	9550514	+18 ... +99.9	±0.15	1.8	2 ... 14	33 x 27 / 14
PURA 22	9550522	+18 ... +99.9	±0.15	2	3.4 ... 25.5	55 x 27 / 18
PURA 30	9550530	+18 ... +99.9	±0.15	2	4.8 ... 36	77 x 27 / 18